




GasAlert Quattro

multi-gas detector


Visual auditing, easy compliance

Rugged and reliable, the GasAlertQuattro four-gas detector combines a comprehensive range of features with simple one-button operation. With flexible power options, the GasAlertQuattro is always ready. The graphic LCD displays easy to identify icons that indicate operational information, such as bump test and calibration status for simplified onsite auditing. IntelliFlash provides continuous visual confirmation of detector operation and compliance. Suited to a wide range of industrial applications including confined space entry, the GasAlertQuattro is fully compatible with BW's MicroDock II automatic test and calibration system.


H₂S
CO
O₂
LEL



Easy one-button operation



Always ready when you are



Simple, visual compliance

- Minimize costs and training with one-button operation
- Field-proven Surecell sensors offer an unprecedented performance in even the harshest environments
- Interchangeable power options with extended battery runtimes for longer shifts



www.egm-ltd.com



Email: info@egm-ltd.com

Wear yellow. Work safe.

See¹green.

Standard features of BW products:


- s Continuous LCD shows real-time gas concentrations
- s Compact and lightweight design makes it comfortable to wear
- s Simple automatic calibration procedure; compatible with BW MicroDock II automatic test and calibration station
- s Full function self-test of sensor(s), battery status, circuit integrity and audible/visual alarms on start up and continuous testing on sensor(s)
- s Bright wide-angled visual alarm bars
- s "UNILATERAL COLLISION PROOF"

GasAlertQuattro Specifications															
Size	5.1 x 3.2 x 1.9 in. / 13.0 x 8.1 x 4.7 cm														
Weight	- 11.15 oz. / 316 g (with rechargeable battery pack) - 11.92 oz. / 338 g (with alkaline battery pack)														
Temperature	-4 to +122°F / -20 to +50°C														
Humidity	10% - 100% RH (non-condensing)														
Alarms	- Visual (six, red LEDs), vibrating, audible (95dB) - Low, High, STEL, TWA, OL (over limit)														
Tests	Sensor integrity, circuitry, battery and audible/visual alarms on activation, battery (continuous), sensor (continuous)														
Pump	Compatible with the Sampler motorized sampling pump														
Battery life	AA alkaline: 14 hrs (+68 to 122°F / +20 to 50°C) Rechargeable: 20 hrs (+68 to 122°F / +20 to 50°C) 18 hrs (-4 to +32°F / -20 to 0°C)														
User options	<table border="0"> <tr> <td>Confidence / compliance beep</td> <td>Flip display</td> </tr> <tr> <td>Confidence flash</td> <td>Combustible gas measurement (% LEL or % by volume methane)</td> </tr> <tr> <td>Set STEL interval</td> <td>User-definable calibration gas concentration</td> </tr> <tr> <td>Sensor on/off</td> <td>Force bump</td> </tr> <tr> <td>Latching alarms</td> <td>Language choices (five)</td> </tr> <tr> <td>Safe display mode</td> <td>Custom start up message</td> </tr> <tr> <td>Force calibration</td> <td>Datalog interval</td> </tr> </table>	Confidence / compliance beep	Flip display	Confidence flash	Combustible gas measurement (% LEL or % by volume methane)	Set STEL interval	User-definable calibration gas concentration	Sensor on/off	Force bump	Latching alarms	Language choices (five)	Safe display mode	Custom start up message	Force calibration	Datalog interval
Confidence / compliance beep	Flip display														
Confidence flash	Combustible gas measurement (% LEL or % by volume methane)														
Set STEL interval	User-definable calibration gas concentration														
Sensor on/off	Force bump														
Latching alarms	Language choices (five)														
Safe display mode	Custom start up message														
Force calibration	Datalog interval														
Ratings	EMI/RFI: Complies with EMC Directive 2004/108/EC IP66/IP67														
Certifications and approvals	<p> Class I, Div. 1, Gr. A, B, C, D</p> <p>ATEX:  II 1 G Ga Ex ia IIC T4</p> <p>IECEX: Ga Ex ia IIC T4 BR-Exia IIC T4</p>														
Warranty	Full two year warranty including all sensors														

Additional GasAlertQuattro features :

- s Powered by an interchangeable rechargeable battery pack or alkaline pack with 3 AA batteries
- s / NE BU O P E R A T I O N I N R A I G H T F O R W A R D F A C E minimizes training
- s Comprehensive datalogging and event logging capacity
- s) N T E L I V E R A T I O N I N O M P L I A T E D H E S E R and supervisors from up to 20 ft. / 6.1 m
- s % N H A R E S D T A C I O N I N I n d u s t r i a l c r o s s s e n s i t i v e g a s e s such as methanol and ethanol (CO and H₂S sensors)
- s Multi-language support in English, French, German, Spanish and Portuguese
- s & I E L D P R O V E S N I S O R S I N P R E C E D E N T E D performance in even the harshest environments.

Options and Accessories

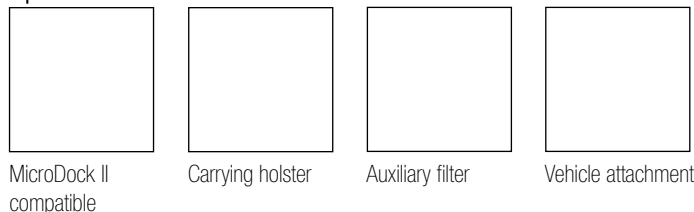

For a complete list of accessories, please contact BW Technologies by Honeywell.

Sensor Specifications		
Gas	Measuring Range	Resolution
Hydrogen sulfide (H₂S)	0-200 ppm	0.1 ppm
Carbon monoxide (CO)	0-1000 ppm	1 ppm
Oxygen (O₂)	0-30.0%	0.1%
Combustible gases (%LEL)	0-100% LEL 0-5.0% v/v	1% 0.1%
Alarm setpoints for all sensors are user adjustable. Setpoint(s) are automatically displayed during instrument start up.		

Locally available from

Environmental & Gas Monitoring Ltd.

Unit 4 B arrmill Road
Galston
Ayrshire
KA4 8HH

Contact Details:
Phone: +44 (0)1563 820444
Fax: +44 (0)1563 820163



by Honeywell

Corporate Headquarters
2840 - 2 Avenue S.E.
Calgary, AB, Canada T2A 7X9
Phone: +1.403.248.9226
Toll free: 1.800.663.4164

www.egm-ltd.com

Email: info@egm-ltd.com

DUE TO ONGOING RESEARCH AND PRODUCT IMPROVEMENT, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.